

ADVENTYS PRO presents :


BRIC 3000 & BRIC 3600

INDUCTION



INDUCTION ADVANTAGES :

More economical, more powerful, more comfortable, more precise, safer, faster, easier to clean.




TOUCH PAD :

The electronic pad detects the user's finger. It's completely water proof.



COOKING SURFACE

Multi layer Composite material (stainless steel AISI 436 + aluminium) recommended for food products.



AVAILABLE POWER

Automatic management of the power according to the pre-selected choice. Maximum available power: 3600 watts.



INSTALLATION :

The hob is delivered « ready for use ». The unit should not be installed above means heat (such as hotcupboard, oven, ...).



MADE IN FRANCE:

R&D department, sales department, metal shop, electronic supply chains and assembly lines: Adventys products are proudly 100% French.

BIO Line Range

• **Pressed stainless steel outer casing** (AISI 304) incorporating a grill surface in a multi layer composite material (stainless steel for food product F17 Mnb, AISI 406 - conform to standard NFA36-711),

- **Generator coil:** 280 mm diameter,
- Control panel for BGIC 3600 C (7 touches pad): On/off, « P » touch, +/- with display, 3 « P » programmable and memorized touches; to see below
- Control panel for BGIC 3600 (4 touches pad): On/Off + 3 touches for pre-managed functions :
 - Delicate cooking as sea-food,....,
 - Medium Cooking as fishes, vegetables, white meats, bacon, eggs...)
 - Efficient Cooking as red meats, sausages....,
- **Power supply :** 230V +/-10% (monophase) AC 50Hz +/-2% or 60 Hz +/-2%
- electrical cable of 140cm,
- **Washable filter supplied with the product,**
- Equipped with 4 adjustable feet
- **Net weight :** 18 kg with carton packaging


Technical specifications :

	Power	Amp load
BGIC 3000	3000 W	12 A
BGIC 3600	3600 W	16 A
BGIC 3600 C	3600 W	16 A


Palettized by 12 units
 Pallet dimensions (mm): width 1000 x depth 1260 x height 1075
 Product dimension (mm): width 392 x depth 531 x height 196
 (with removable grease preventer h=250mm)
 Packaged product dimension (mm): width 495 x depth 620 x height 375.

Delivered with :
 . Extractive Drawer for juice: 1 .5 liter capacity
 . Cleaning spatula
 . Utility tong
 . Polypropylene measuring jug
 . Brochure.

• **Standards :** complies with EN 60335-2-36 (European standard for safety of electrical appliances), EN55011 et EN 55014-2 (CEM).

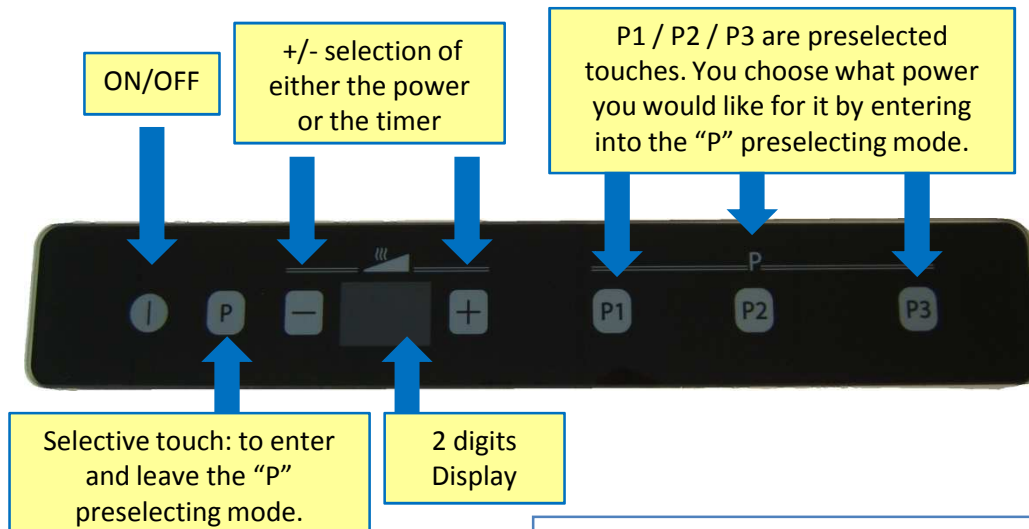

pos.	température	pos.	température	pos.	température
1	50°C	5	130°C	9	210°C
2	70°C	6	150°C	10	230°C
3	90°C	7	170°C	11	250°C
4	110°C	8	190°C	12	280°C

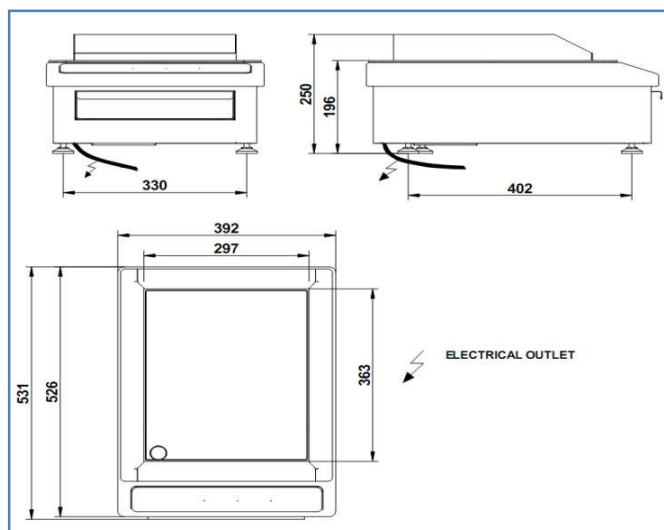

ADVENTYS PRO

Groupe VPG Industries

38, rue du 8 Mai 1945 - F-21250 SEURRE - France .Tel : 33 (0) 3 80 204 615 - Fax : 33 (0) 3 80 204 219 - Site Web : www.plaque-induction.com - email : adventys@adventys.com
 S.A.S au Capital de 214.000 € - Code APE : 2751Z - RCS Dijon 513 510 412 - TVA FR 43 513 510 412