

SHELVING - PANS

by TOURNUS



TOURNUS
EQUIPEMENT

SHELVING WITH


Shelving with removable shelves

shelves
(cross member + polyethylene)

3 depths :
400, 500 and 560 mm (GN).

12 lengths :
608, 708, 808, 910, 1010,
1110, 1210, 1312, 1412,
1512, 1612, 1714 mm.

2 types of shelves :
high density polyethylene or
anodised Duralinox.



UPRIGHTS

2 heights :
1750 mm with 3, 4 or 5
levels

2050 mm with 4, 5 or 6
levels



EASY ASSEMBLY (12 lengths)



690 mm	1292 mm
790 mm	1394 mm
890 mm	1494 mm
992 mm	1594 mm
1092 mm	1694 mm
1192 mm	1796 mm

COMBINATIONS



1628 mm	2936 mm	4278 mm
1728 mm	3136 mm	4378 mm
1830 mm	3172 mm	4478 mm
1932 mm	3236 mm	4578 mm
2032 mm	3272 mm	4612 mm
2132 mm	3336 mm	4678 mm
2232 mm	3372 mm	4712 mm
2334 mm	3438 mm	4778 mm
2432 mm	3472 mm	4814 mm
2532 mm	3540 mm	4878 mm
2634 mm	3572 mm	4914 mm
2736 mm	3674 mm	4978 mm
2834 mm	3772 mm	5016 mm
	3812 mm	5080 mm
	3912 mm	5158 mm
	3976 mm	5182 mm
	4078 mm	5218 mm
	4178 mm	5284 mm




line mounting



with removable aluminium
shelves



width GN 1/1



low shelving 1 level

low shelving
one level



- 2 low uprights
+ 1 polyethylene
shelfgrid


- maximum load :
200 kg

REMOVABLE SHELVES



Angle mounting


WALL SHELVES

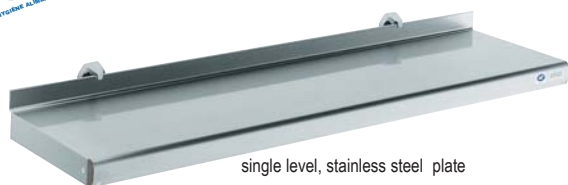

single level, stainless steel plate



s/s adjustable shelf, 2 levels

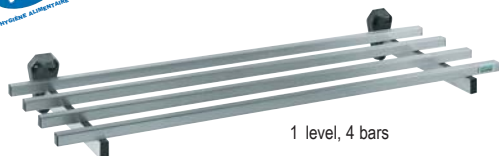


1 level, 4 bars





with high density polyethylene shelves



s/s adjustable shelf, 4 levels

shelf one level		length (mm) :	
		1000	1600
	- upstand height 40 mm or welded s/s bars	1200	1800
	- useful width 360 mm	1400	2000
		1500	2200

shelves with polyethylene shelves		length (mm) :	
		1000	1600
	- 3 levels, height 980 mm	830	1030
	- 4 levels, height 1470 mm	1230	1430
	- 5 levels, height 1960 mm	1530	

s/s adjustable shelf		length (mm) :	
		1000	1600
	- 1,2,3 or 4 levels width 290 or 390 mm	1200	1800
	- adjustable stainless steel trays with splashback, height 40 mm.	1400	2000
		1500	2200

RACKING SHELVES

in stainless steel or anodised aluminium



perforated shelves



solid shelves

EMIROC SHELVING

synthetic resin



GN PANS



polycarbonate pans



polypropylene pans



stainless steel pans

Shelves



3 depths :

400, 500 and 650 mm.

5 lengths :

610, 715, 1150, 1255 and 1365 mm



2 types of trays :

18-10 stainless steel perforated or solid shelves and anodised aluminium, solid shelves.

TUBES



Anodised aluminium or 18-10 stainless steel with or without wheels, height 1780 mm

EASY ASSEMBLY (5 lengths)



655 mm	1300 mm
760 mm	1410 mm
1195 mm	

COMBINATIONS



2495 mm	3900 mm
2605 mm	4015 mm
2710 mm	4120 mm
2820 mm	4230 mm
3045 mm	4345 mm
3150 mm	4450 mm
3255 mm	4555 mm
3360 mm	4660 mm
3475 mm	4780 mm
3585 mm	4885 mm
3690 mm	4995 mm
3800 mm	5095 mm

Emiroc shelving

in synthetic resin



2 depths :

445 and 625 mm.

2 heights :

1700 mm (4 levels).
2150 mm (5 levels).

COMBINATIONS



2110 mm	4860 mm
2490 mm	5180 mm
2810 mm	5550 mm
3140 mm	5880 mm
3510 mm	6200 mm
3830 mm	6570 mm
4160 mm	6900 mm
4530 mm	7220 mm

stainless steel pans

- with or without handles
- pans from GN 2/1 to 1/9
- perforated stainless steel pans

polycarbonate pans

- GN pans from 2/1 to 1/6
- depth . from 65mm to 200 mm


polypropylene pans

- GN pans from 1/1 to 1/6
- depth. from 65 to 200 mm


Tournus shelving complies with all requirements :

- easy assembly
- stable
- hygienic
- modularity


The shelving is suitable for cold rooms and stores




removable polyethylene shelves




assembly without tools



Angle mounting



adjustable feet



machine washable

SHELVING WITH REMOVABLE SHELVES

- **Easy assembly** : one person can assemble 5 metres in 5 minutes, no tools required.

- **Rigid structures** : tapered self locking fittings.

- **Robustness and longevity** : due to the choice of materials : high density polyethylene, anodised aluminium .

Tubular upright 32 x 30 mm thick with adjustable feet, tubular side members 25 x 42 mm .

Temperature resistance between - 30°C and + 60°C.


Removable shelves machine washable up to 90°.


Max load capacity per shelf, 50 kg, 120 kg for the 2 long lengths .

- **Modularity** : line mounted or corner mounted.

12 base lengths.

Height 1750 mm or 2050 mm on which are premounted 3, 4, 5 or 6 fixing points which determine the shelf levels as per table below.

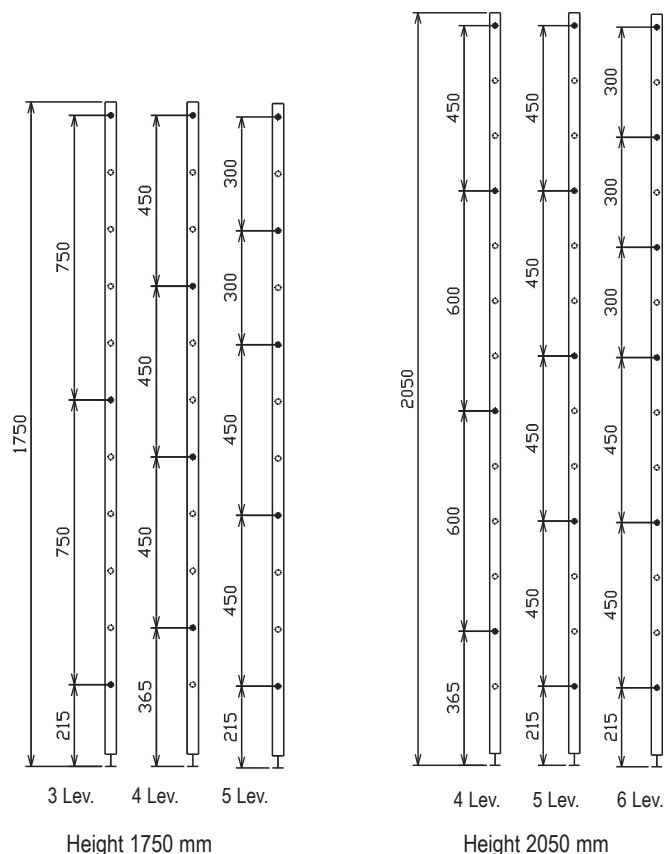

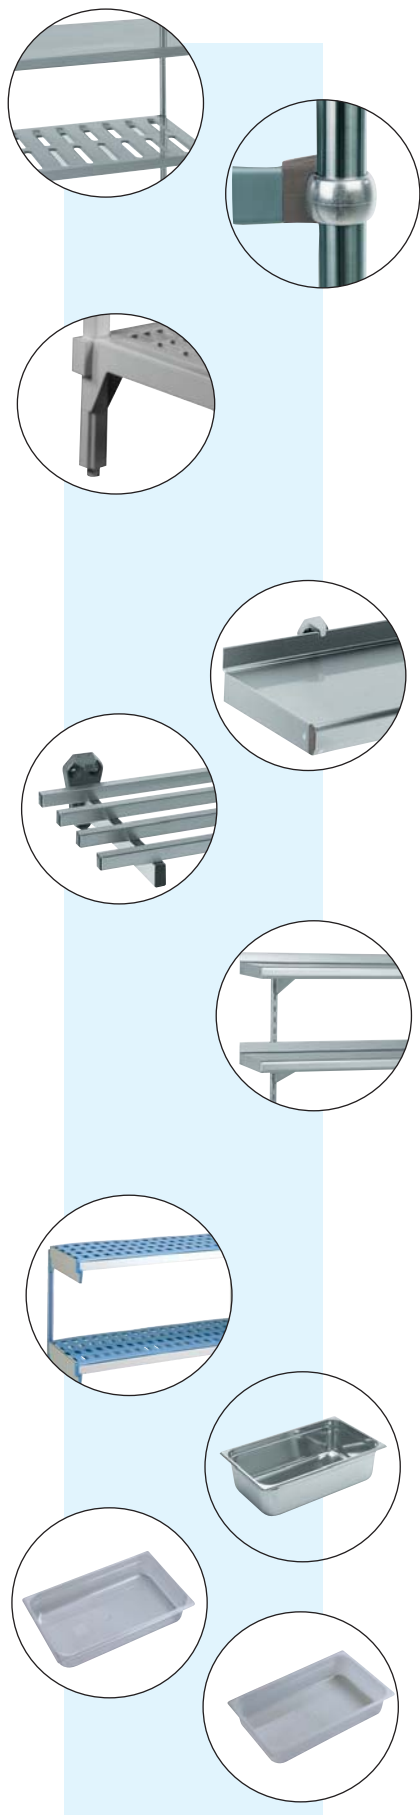

SHELVING

- Two versions : stainless steel 18-10 or duralinox alloy.
- Uprights Ø 32 mm, height 1780 mm with shelf markers every 20 cm and adjustable feet.
- Solid or perforated shelves equipped with locking collars allowing multi-positioning on the uprights.
- Maxi load : 200 kg per level.

EMIROC SHELVING

- Heavy duty polyethylene allowing loads up to 150 kg per shelf and down to - 40°C.
- Tapered self locking fittings enabling assembly of all elements without tools : uprights, feet, cross members, brackets and shelves

SINGLE LEVEL WALL SHELVING

- **1 level** with 2 brackets for wall mounting.
- 2 models : stainless steel with 40 mm upstand or 4 welded bars.
- Mounted 40 mm from wall.

RAIL WALL SHELVING

- Stainless steel shelves with rear upstand of 40 mm .
- Rails with 55 mm pitch, 315 mm height for one level, 700 mm for 2 levels and 1470 mm for 3 or 4 levels.

WALL SHELVES WITH POLYETHYLENE RACKS

- Polyethylene racks + frame sitting on 2 sliding supports mounted on 2 wall rails.
- Number of levels : 3, 4 or 5 depending on the length of the rails i.e. : 980, 1470 and 1960 mm.

GN PANS

- 3 ranges :
 - * **stainless steel pans** (refrigeration, transport, cooking, distribution),
 - * **polycarbonate pans** (preparation, storage, transport, presentation), working temperature: - 40°C to + 99°C.
 - * **polypropylene** pans (preparation, storage, freezing), working temperature : - 40°C to + 70°C.

All the pans comply with EN 631.1 standard

- All polycarbonate pans and polypropylene pans have scale marks for capacity measurement.
- Depth : from 20 to 200 mm.



Most of our product are available ex-stock within 48 hours.



A large number of products have the N-F hygiène alimentaire seal label. They are marked with this logo.

TOURNUS
EQUIPEMENT

TOURNUS EQUIPEMENT

25 avenue Jean Moulin - BP 59 - 71700 TOURNUS - FRANCE

Tel : + 33 3 85 27 42 65 - Fax : + 33 3 85 27 42 60

E-mail : export@tournus.com - Site web : www.tournus.com