




ADVENTYS presents :

BWIC 3000 & BWIC 3600




INDUCTION ADVANTAGES :
 More economical, more powerful, more comfortable, more precise, safer, faster, easier to clean.



TOUCH PAD :
 The electronic pad detects the user's finger. It's completely water proof.




VITROCERAM GLASS :
 The glass is designed to **resist** to high temperature (thickness : 4 mm).



AVAILABLE POWER :
 From 50 W (power setting 1)
 to 3000 or 3600 W (power setting 12)



INSTALLATION :
 The hob is delivered « ready for use ». The unit should not be installed above means heat (such as hotcupboard, oven, ...).




MADE IN FRANCE:
 R&D department, sales department, metal shop, electronic supply chains and assembly lines:
 Adventys products are proudly 100% French.

BIO Line Range

. **Stamped stainless steel outer casing AISI 304 incorporating vitroc ceramic wok top;** curvature radius of 210,7 mm

- **Generator coil:** 280 mm diameter,
- **Timer:** integrated 99 minute timer with audio and visual alarm and power shut down mode,
- **Controls:** Glass touch control pane having coil selector control, manual power setting, (+/-) with display, boost touch, preset power setting and timer control with display,
- **Power supply:** 230V +/-10% (1 ph) AC 50 +/-2%-60Hz +/-2% +electrical cable of 1500 mm ,
- **Net weight :** 12.1 kg with carton packaging
- **Washable filter** supplied with the unit,
- **Standards:** complies with EN 60335-2-36 (European standard for safety of electrical appliances), EN55011 et EN 55014-2 (CEM).

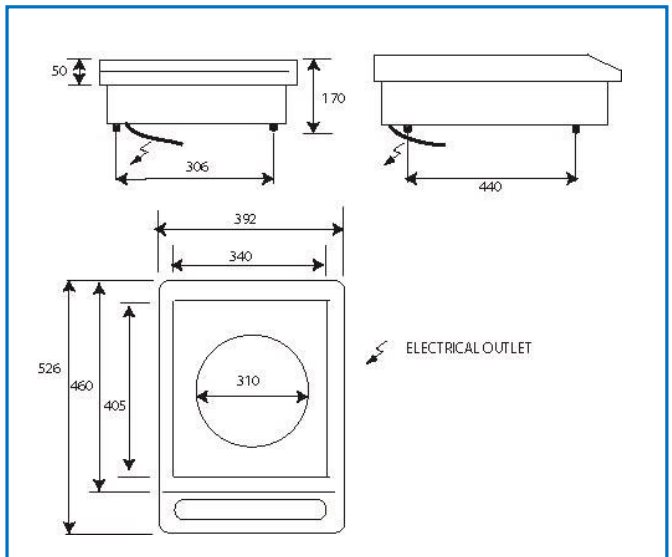

POWER SETTING

Medium 6	500 watts
High 10	1400 watts
Maximum 12	3000 watts
Boost mode :	3600 W sur BWIC 3600

TECHNICAL SPECIFICATIONS

	Power	Amps
BWIC 3000	3000 W	12 A
BWIC 3600	3600W	16 A

Wok resto: pan available in option (360 mm diameter)
Concept Wok Gastro: pan and accessories dedicated to Adventys available in option

The product is palletized by 24

Pallet dimension (mm): width 1000 x depth 1260 x height 1225
 The product includes as standard a brochure, a washable filter and a 1500 mm power cord

Product dimension (mm): width 392 x depth 526 x height 172

Packaged product dimension (mm): width 495 x depth 620 x height 375



ADVENTYS PRO

Groupe VPG Industries